




HG126 USER MANUAL

hygger 304 stainless steel air stone

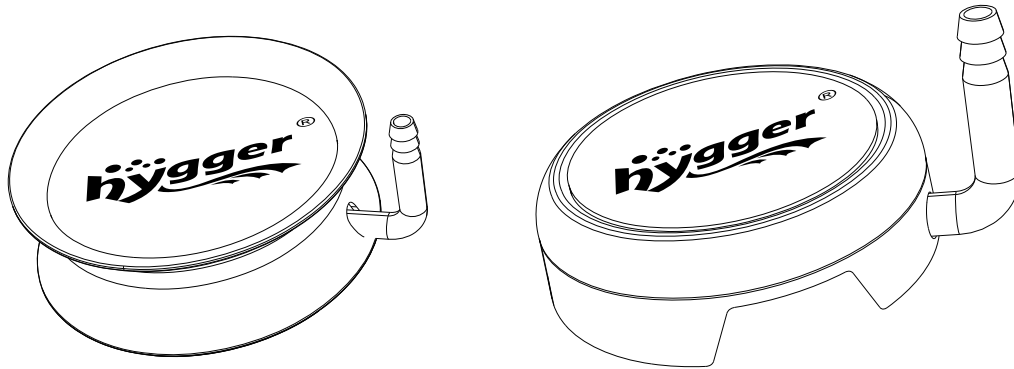

hygger 304 stainless steel nano air stone is perfect for freshwater aquariums and ponds.

ATTENTIONS

- The air stone is not suitable for seawater and leaky environments.
- For better aeration, the air stone should be soaked in water for 1 to 2 hours before use.
- Please install the pump with a check valve to avoid water backflow and potential damage to the pump. The air pump is not included.
- It is recommended to clean the air stone every two months to prevent clogging and maintain good dissolved oxygen levels.
- If the water depth exceeds 80 CM, the pressure of the air pump should reach 0.018 Mpa, and the optimal pressure range is 0.02-0.03 Mpa.


1. PRODUCT FEATURES

1. Nano-hole, bubbling atomizing, high dissolved oxygen
2. 304 stainless steel disk prevents displacement and floating
3. Frosted feel, elegant appearance
4. Corundum material, aging resistance, good air permeability, sturdy and durable

2. PRODUCT SPECIFICATIONS

Model	Internal/external diameter	Applicable aquarium (length)	Air tube caliber	The required power of the air pump
HG126-Rim-S/ HG126-Round-S	1.4/1.7inch	<16inch	4mm	≥1Watts
HG126-Rim-M/ HG126-Round-M	2.2/2.5inch	16-32inch	4mm	≥2Watts
HG126-Rim-L/ HG126-Round-L	3.0/3.3inch	24-52inch	4mm	≥4Watts
HG126-Rim-XL/ HG126-Round-XL	3.7/4.1inch	>32inch	4mm	≥4Watts

Installation Diagram

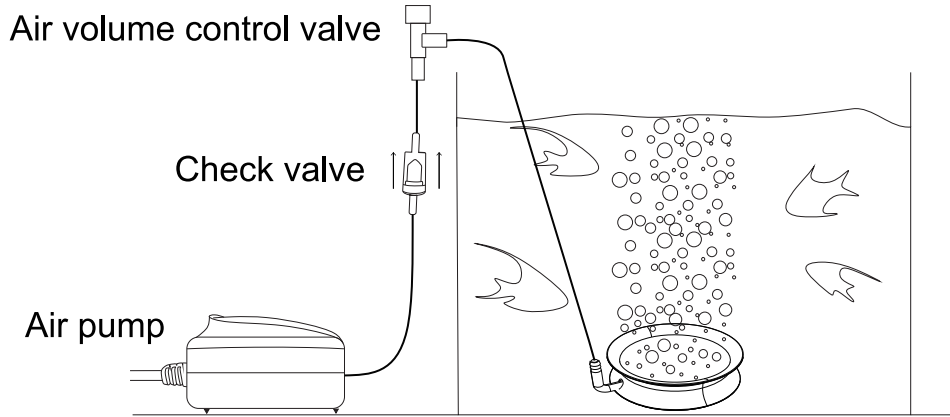

3. TROUBLESHOOTING

1. **No airflow output:** Check if the check valve is installed backward or if the air pump power is too low.
2. **Uneven airflow output:** Set the air pump to the highest setting and reinstall the air tubing for a more defined refinement effect.

3. Airflow output with large air bubbles: Wait 1-2 days for the air stone to return to normal.

4. PACKING LIST

1x Air stone

1x Air tube

1x Suction cup

1x Air volume control valve

1x Check valve

1x T-shaped shunt tube

1x User manual

5. CONTACT INFORMATION

E-mail: service@hygger-online.com

Website: www.hygger-online.com